SPECIFICATIONS

AKCVQP80

CENTRAL VACUUMS

PLASTIC CENTRAL VACUUM POWER UNIT

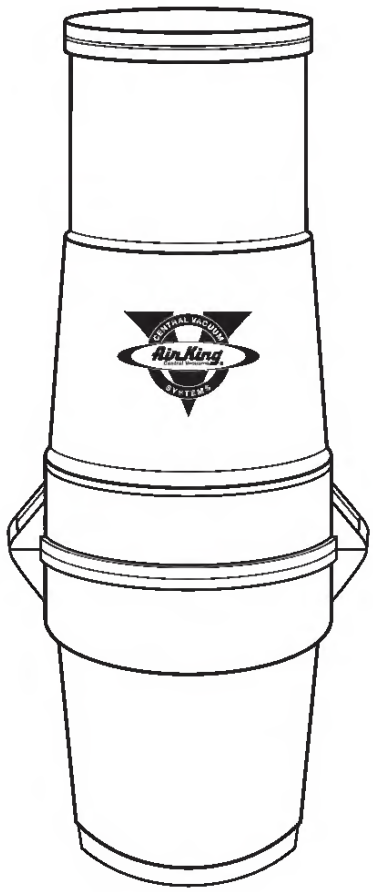

- **Motor**
  Three stage 120 volt, double ball bearing with tangential bypass discharge and thermoset fan end bracket. 13.13 amps with Quiet Motor Technology.

- **Power Unit Body**
  Durable plastic body will not rust, dent, or chip.

- **Performance**
  CFM at 2" opening: 96
  Water Lift: 136"
  Air Watts: 465

- **Collection**
  9 Gallon Bagged or Bagless collection canister with HEPA membrane filter, made with Dupont™ Teflon® fluropolymer.

- **Recommended Home Size**
  Homes up to 8,000 square feet.

- **Mounting**
  Includes metal mounting bracket, an extra utility inlet, and exhaust muffler for added sound protection.

- **Shipping Information**
  UPC: 0-83162-
  Shipping Weight: lbs.

PROJECT		ARCHITECT	
LOCATION		ENGINEER	
CONTRACTOR		SUBMITTED BY	DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Dntario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 4-07

Downloaded from www.Manualslib.com manuals search engine